

Thermoelectric cooling unit



Description

Order Number:	3200303
Brand Name:	SOLITHERM PELTIER
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress Protection:	IP 66 / UL Type 12, 4, 4X
Note:	The torque for the mounting nuts should be 4.5 Nm.
Approvals:	CE, cURus

Accessories:



[Bimetallic temperature controller](#)



[Thermostat 301510](#)




[Condensate Kit 3152 / 3200](#)

Technical Data

Cooling capacity L35L35:	200 W
Operating Temperature Range:	-20°C - 70°C
UL temperature range:	-20°C - 65°C
Air flow volume (system / unimpeded):	Ambient air circuit: 120 / 260 m ³ /h Cabinet air circuit: 120 / 260 m ³ /h
Mounting:	Recessed
Dimensions A x B x C (D+E):	400 x 180 x 170 (76+94) mm
Weight:	10 kg
Cut out dimensions:	370 x 155 mm
Voltage / Frequency:	24 V DC
Current L35L35:	9.4 A
Starting current:	17.1 A
Max. current:	13.5 A
Nominal power L35L35:	226 W
Max. power:	324 W
Fuse:	16 A (T)
Connection:	Connection terminal block


Please click on the graphics to download.
 More CAD drawings can be found under [Product Download](#).
 > [Overview Product Group Cooling Units - PELTIER](#)

Performance graph:

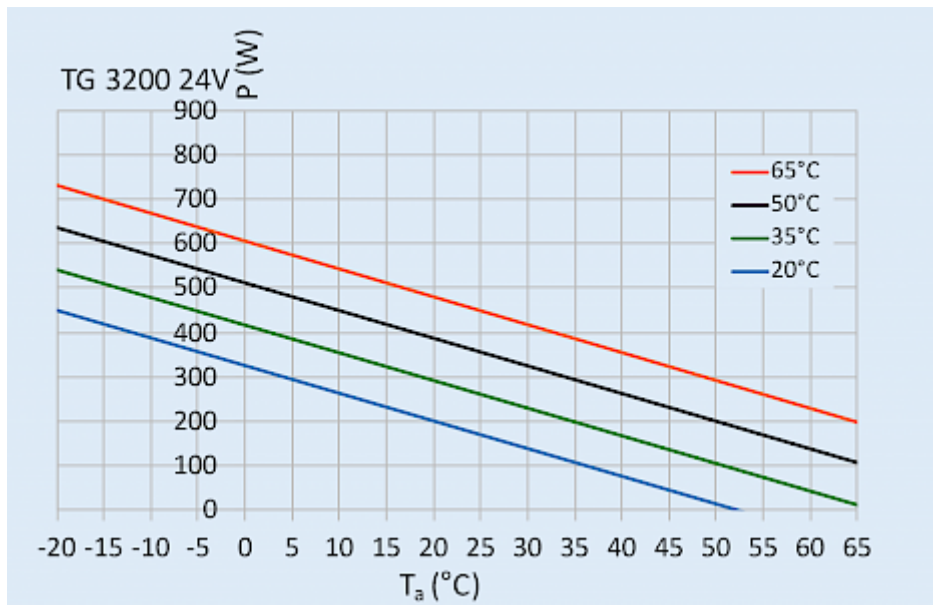


[click image to enlarge](#)

Air flow:

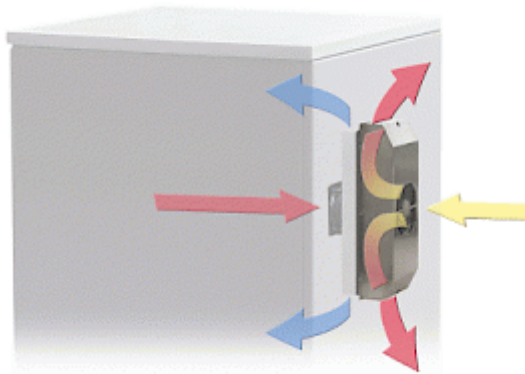

[click image to enlarge](#)

Cut Out Dimension:

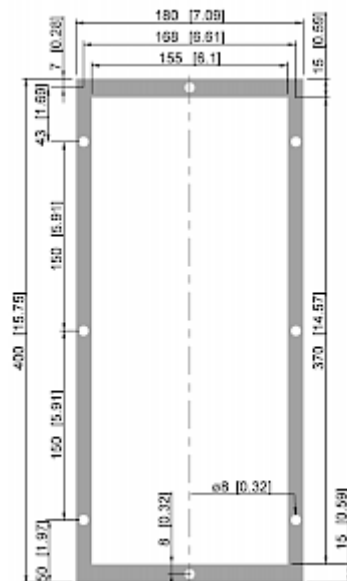

[click image to enlarge](#)

Order Information

Stainless steel AISI 316 (V4A) housing part no.	32003034
Box dimension	486.6 x 205 x 183.5 mm
Gross weight	12 kg
Taric code	84158300
GTIN (EAN)	5350604350304