

Control Cabinet Air Conditioner



Description

Order Number:	43252001
Brand Name:	COMPACT INDOOR
Colour:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress Protection:	IP 54 / TYPE 12
Approvals:	CE, cURus, cULus


Technical Data

Cooling capacity L35L35:	2.50 kW @ 50 Hz 2.51 kW @ 60 Hz
Cooling capacity L35L50:	1.97 kW @ 50 Hz 2.10 kW @ 60 Hz
Compressor type:	Rotary piston compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	850 g / 30 oz
High / low Pressure:	29.5 / 6 bar 425 / 88 psig
Operating Temperature Range:	10°C - 55°C
Air flow volume (system / unimpeded):	Ambient air circuit: 750 / 1200 m ³ /h Cabinet air circuit: 550 / 1200 m ³ /h
Mounting:	Wall mounted
Dimensions A x B x C (D+E):	1,230 x 500 x 340 mm
Weight:	73 kg
Cut out dimensions:	1,130 x 430 mm
Voltage / Frequency:	400/460 V - 50/60 Hz 2~
UL Voltage / Frequency:	400/460 V ~ 60 Hz 2~
Current L35L35:	2.9 A @ 50 Hz 2.6 A @ 60 Hz
Starting current:	6.1 A / 6.8 A
Max. current:	3.8 A / 3.2 A
Nominal power L35L35:	940 W @ 50 Hz 1.18 kW @ 60 Hz
Max. power:	1.25 kW @ 50 Hz 1.46 kW @ 60 Hz
Fuse:	2 x 6 A (T)
Short-circuit current rating:	5 kA
Connection:	Connection terminal block

Please click on the graphics to download.
 More CAD drawings can be found under [Product Download](#).


> [Overview Product Group Cooling Units - COMPACT](#)

Performance graph:

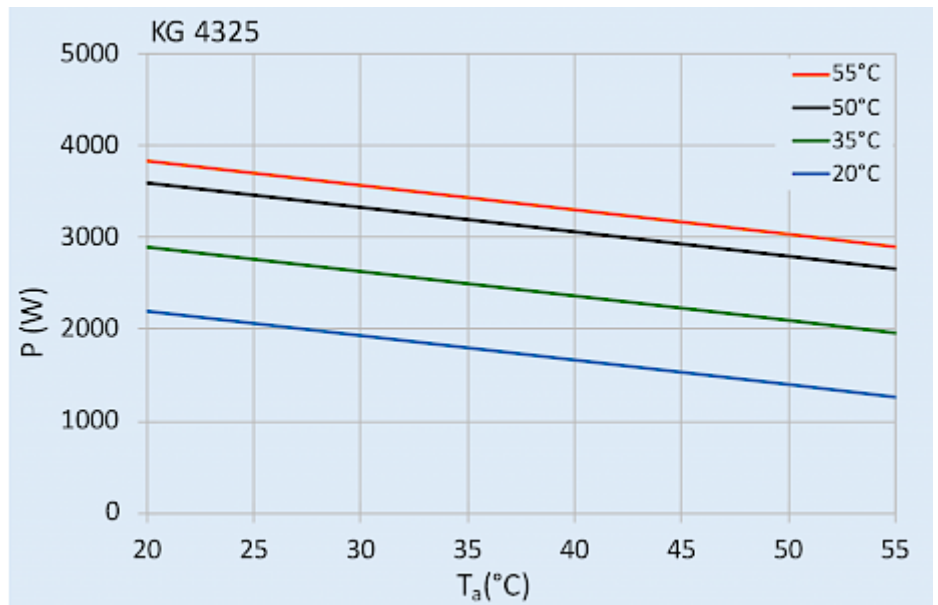


click image to enlarge

Air flow:

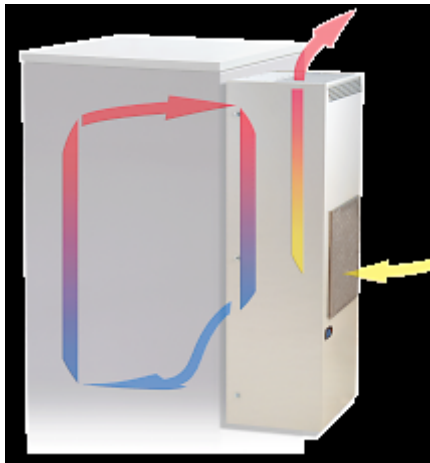

click image to enlarge

Cut Out Dimension:

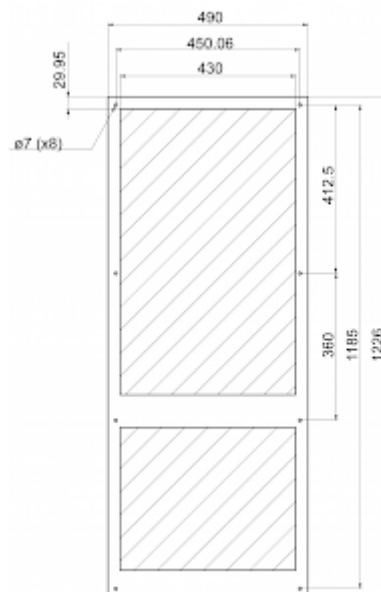

click image to enlarge

Order Information

Stainless steel housing part no.	4325202
With condensate evaporation part no.	43252101
Box dimensions	1,265 x 543 x 375 mm
Gross weight	77 kg
Taric code	84158200
GTIN (EAN)	5350604360938