

Roof mounted filter fan



Description

Order Number:	6064D2000
Brand Name:	SOLIFLEX
Colour:	RAL 7035
Housing Material:	Mild steel, powder coated
IP protection class to EN 60 529:	IP 54, Type 1, 12
Included:	G3 filters
Optional:	Aluminium filter kit Temperature control thermostat Alarm thermostat
Approvals:	CE, cURus

Technical Data


Air flow volume (system / unimpeded):	320 m³/h
Air flow unimpeded IP 54:	275 m³/h
Operating Temperature Range:	-10°C - 55°C
Static pressure:	79 Pa
Mounting:	top mounted
Dimensions A x B x C (D+E):	147 x 457 x 457 mm
Weight:	5.8 kg
Cut out dimensions:	291 x 291 mm
Voltage / Frequency:	24 V DC
Rated current:	0.84 A
Power consumption:	20 W
Degree of separation IP 54:	85% - DIN 24185
Filter class (ISO 16890):	G3 (Aluminium optional)
Noise level:	51 dB(A)
Connection:	4 pole connector (provided)

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview Product Group SOLIFLEX - Filter fans & exhaust filters](#)

Performance graph:

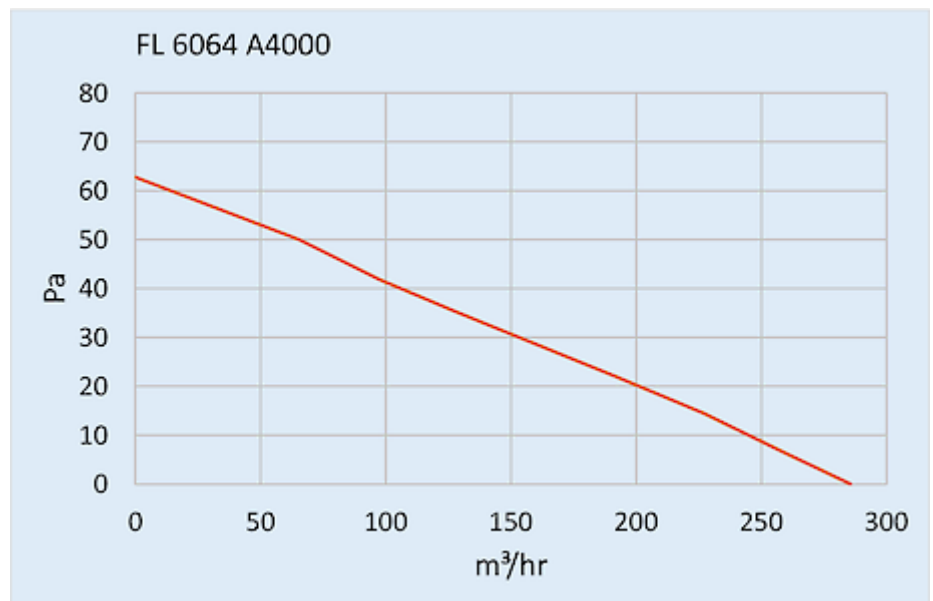

[click image to enlarge](#)

Dimensions:

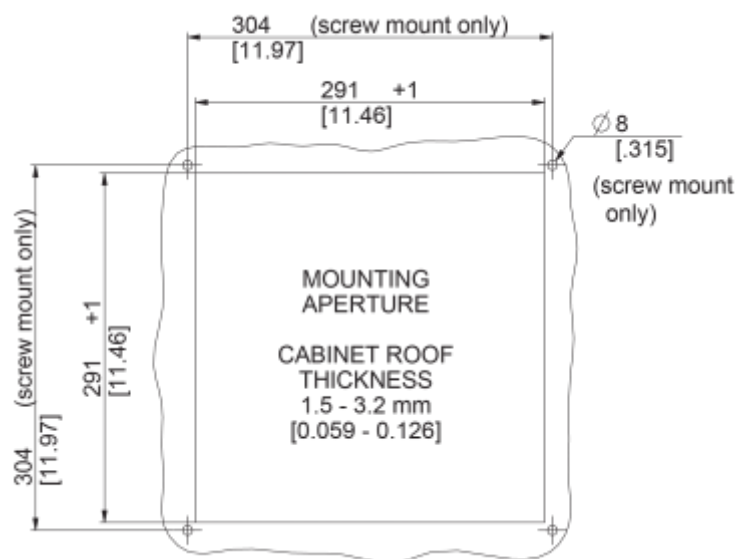

[click image to enlarge](#)

Order Information

Taric code	84145915
GTIN (EAN)	5350604100893