


Thermoelectric cooling unit



Description


Order Number:	6155303
Brand Name:	SOLITHERM PELTIER
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress Protection:	IP 66 / UL Type 12, 4, 4X
Note:	The torque for the mounting nuts should be 4.5 Nm.
Approvals:	CE, cURus
Accessories:	 Condensate Kit 3102 / 6155 / 6205

Technical Data

Cooling capacity L35L35:	150 W
Operating Temperature Range:	-20°C - 70°C
UL temperature range:	-20°C - 65°C
Air flow volume (system / unimpeded):	Ambient air circuit: 120 / 260 m ³ /h Cabinet air circuit: 60 / 170 m ³ /h
Mounting:	Recessed
Dimensions A x B x C (D+E):	500 x 330 x 190 (130+60) mm
Weight:	18 kg
Voltage / Frequency:	120 - 230 V ~ 50/60 Hz
Current L35L35:	1.4 A @ 120 V 0.7 A @ 230 V
Starting current:	2.1 A @ 120 V 1.1 A @ 230 V
Max. current:	1.5 A @ 120 V 0.8 A @ 230 V
Nominal power L35L35:	170 W
Max. power:	180 W
Fuse:	3 A (T) @ 120 V 2 A (T) @ 230 V
Connection:	8-Pole connector

Please click on the graphics to download.
 More CAD drawings can be found under [Product Download](#).
 > [Overview Product Group Cooling Units - PELTIER](#)

Performance graph:

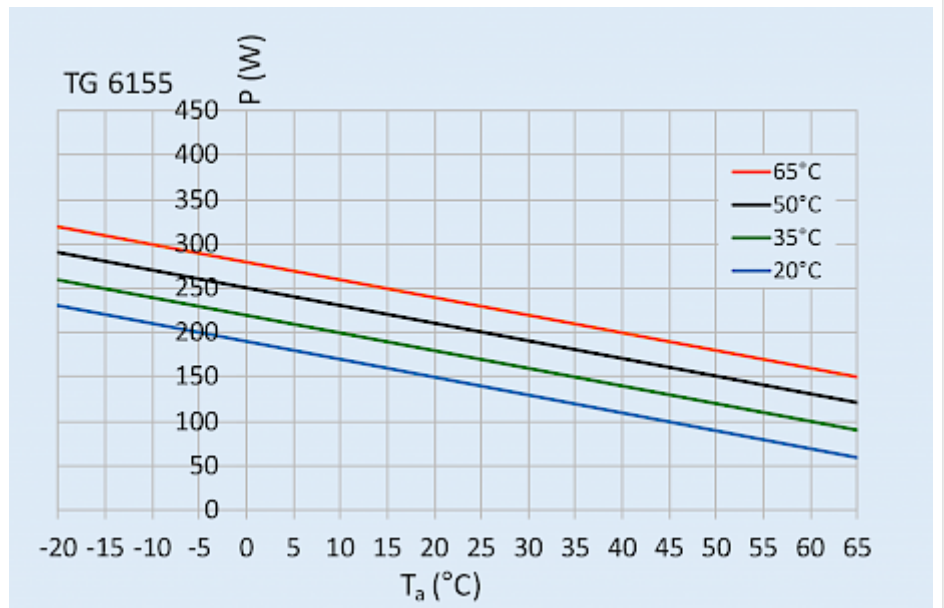

[click image to enlarge](#)

Order Information

Stainless steel AISI 316 (V4A) housing part no.	61553034
Box dimension	586.6 x 354 x 227 mm
Gross weight	21.5 kg
Taric code	84158300
GTIN (EAN)	5350604350281