


Thermoelectric cooling unit



Description


Order Number:	6155305
Brand Name:	SOLITHERM PELTIER
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress Protection:	IP 66 / UL Type 12, 4, 4X
Note:	The torque for the mounting nuts should be 4.5 Nm.
Approvals:	CE, cURus
Accessories:	 Condensate Kit 3102 / 6155 / 6205

Technical Data

Cooling capacity L35L35:	150 W
Operating Temperature Range:	-20°C - 70°C
UL temperature range:	-20°C - 65°C
Air flow volume (system / unimpeded):	Ambient air circuit: 120 / 260 m ³ /h Cabinet air circuit: 60 / 170 m ³ /h
Mounting:	Wall mounted (with frame)
Dimensions A x B x C (D+E):	500 x 330 x 200 mm
Weight:	19 kg
Cut out dimensions:	244 x 428 mm
Voltage / Frequency:	120 - 230 V ~ 50/60 Hz
Current L35L35:	1.4 A @ 120 V 0.7 A @ 230 V
Starting current:	2.1 A @ 120 V 1.1 A @ 230 V
Max. current:	1.5 A @ 120 V 0.8 A @ 230 V
Nominal power L35L35:	170 W
Max. power:	180 W
Fuse:	3 A (T) @ 120 V 2 A (T) @ 230 V
Connection:	8-Pole connector


Please click on the graphics to download.
 More CAD drawings can be found under [Product Download](#).
 > [Overview Product Group Cooling Units - PELTIER](#)

Performance graph:

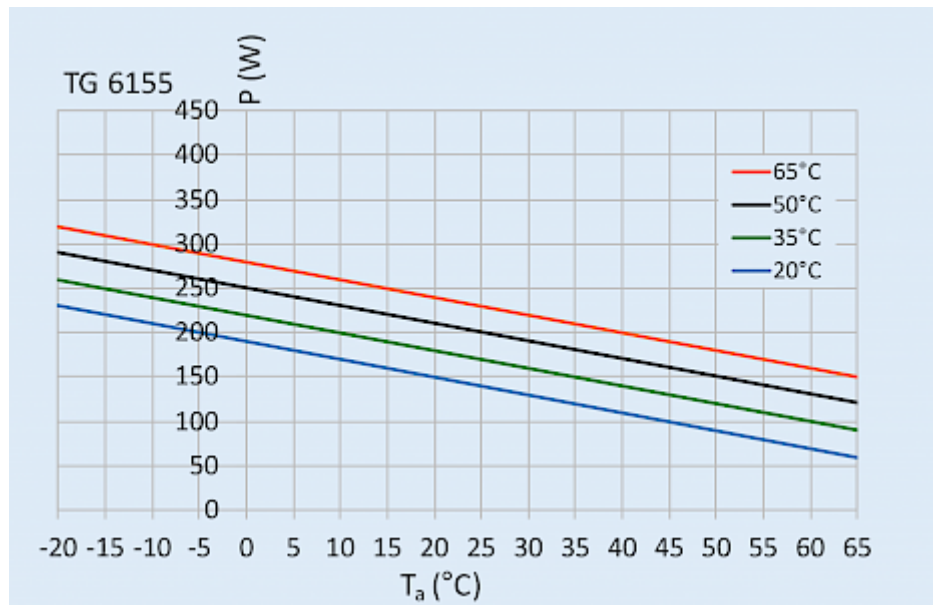

click image to enlarge

Cut Out Dimension:

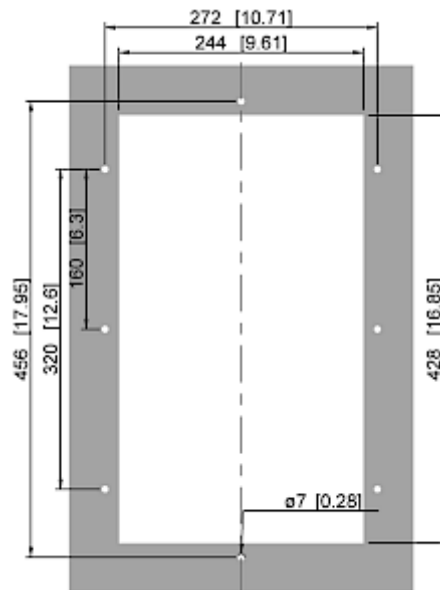

click image to enlarge

Order Information

Stainless steel AISI 316 (V4A) housing part no.	61553054
Box dimension	586.6 x 354 x 227 mm
Gross weight	22.5 kg
Taric code	84158300
GTIN (EAN)	5350604350298