


## Thermoelectric cooling unit



### Description


<b>Order Number:</b>	6205305
<b>Brand Name:</b>	SOLITHERM PELTIER
<b>Housing Material:</b>	Stainless steel AISI 304 (V2A)
<b>Ingress Protection:</b>	IP 66 / UL Type 12, 4, 4X
<b>Note:</b>	The torque for the mounting nuts should be 4.5 Nm.
<b>Approvals:</b>	CE, cURus
<b>Accessories:</b>	 <a href="#">Condensate Kit 3102 / 6155 / 6205</a>

## Technical Data

<b>Cooling capacity L35L35:</b>	200 W
<b>Operating Temperature Range:</b>	-20°C - 70°C
<b>UL temperature range:</b>	-20°C - 65°C
<b>Air flow volume (system / unimpeded):</b>	Ambient air circuit: 106 / 260 m <sup>3</sup> /h Cabinet air circuit: 150 / 260 m <sup>3</sup> /h
<b>Mounting:</b>	Wall mounted (with frame)
<b>Dimensions A x B x C (D+E):</b>	500 x 330 x 200 mm
<b>Weight:</b>	21 kg
<b>Cut out dimensions:</b>	244 x 428 mm
<b>Voltage / Frequency:</b>	120 - 230 V ~ 50/60 Hz
<b>Current L35L35:</b>	2.1 A @ 120 V 1.1 A @ 230 V
<b>Starting current:</b>	3.2 A @ 120 V 1.7 A @ 230 V
<b>Max. current:</b>	2.2 A @ 120 V 1.2 A @ 230 V
<b>Nominal power L35L35:</b>	250 W
<b>Max. power:</b>	270 W
<b>Fuse:</b>	4 A (T) @ 120 V 3 A (T) @ 230 V
<b>Connection:</b>	8-Pole Connector


Please click on the graphics to download.  
 More CAD drawings can be found under [Product Download](#).  
 > [Overview Product Group Cooling Units - PELTIER](#)

**Performance graph:**

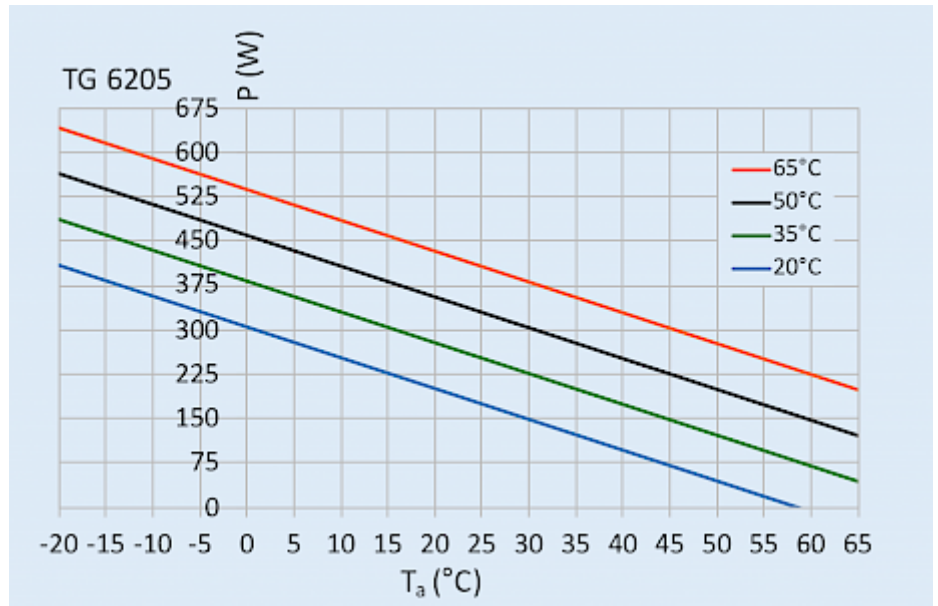

click image to enlarge

**Cut Out Dimension:**

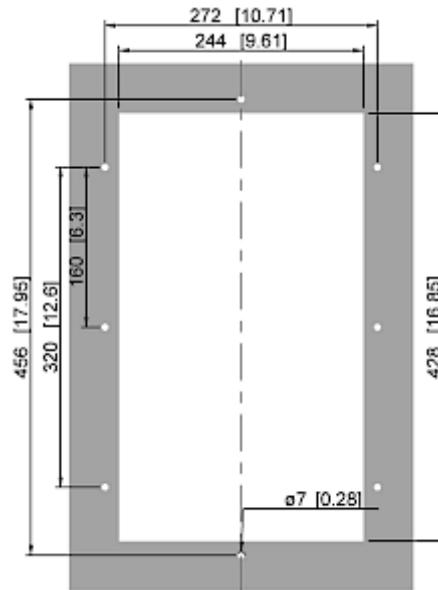

click image to enlarge

## Order Information

<b>Stainless steel AISI 316 (V4A) housing part no.</b>	62053054
<b>Box dimension</b>	586.6 x 354 x 227 mm
<b>Gross weight</b>	24.3 kg
<b>Taric code</b>	84158300
<b>GTIN (EAN)</b>	5350604350458