


Thermoelectric cooling unit



Description


| | |
|----------------------------|--|
| Order Number: | 6805303 |
| Brand Name: | SOLITHERM PELTIER |
| Housing Material: | Stainless steel AISI 304 (V2A) |
| Ingress Protection: | IP 66 / UL Type 12, 4, 4X |
| Note: | The torque for the mounting nuts should be 4.5 Nm. |
| Approvals: | CE, cURus |
| Accessories: | <div>  Condensate Kit 6805 </div> |

Technical Data

| | |
|--|--|
| Cooling capacity L35L35: | 800 W |
| Operating Temperature Range: | -20°C - 70°C |
| UL temperature range: | -20°C - 65°C |
| Air flow volume (system / unimpeded): | Ambient air circuit: 480 / 650 m³/h Cabinet air circuit: 480 / 650 m³/h |
| Mounting: | Recessed |
| Dimensions A x B x C (D+E): | 972 x 514 x 211 (136,5+74,5) mm |
| Weight: | 66 kg |
| Cut out dimensions: | 464 x 922 mm |
| Voltage / Frequency: | 120 - 230 V ~ 50/60 Hz |
| Current L35L35: | 8.2 A @ 120 V 4.3 A @ 230 V |
| Starting current: | 14 A @ 120 V 8 A @ 230 V |
| Max. current: | 9 A @ 120 V 4.7 A @ 230 V |
| Nominal power L35L35: | 979 W |
| Max. power: | 1078 W |
| Fuse: | 13 A (T) @ 120 V 7 A (T) @ 230 V |
| Connection: | 8-Pole Connector |


Please click on the graphics to download.
 More CAD drawings can be found under [Product Download](#).
 > [Overview Product Group Cooling Units - PELTIER](#)

Performance graph:

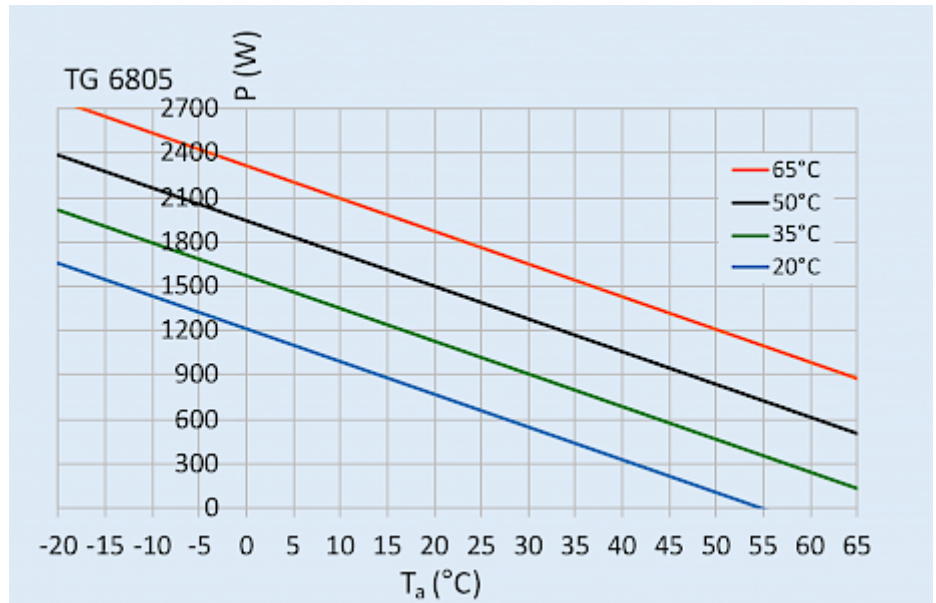

[click image to enlarge](#)

Cut Out Dimension:

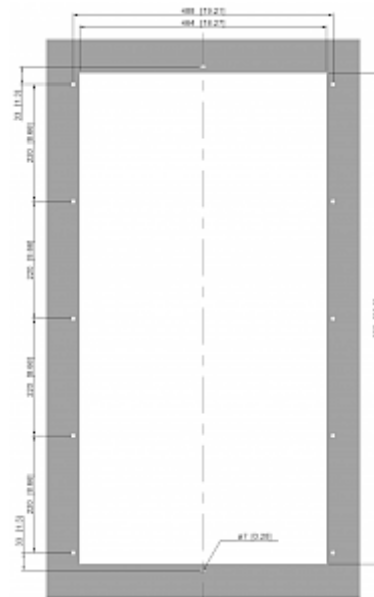

[click image to enlarge](#)

Order Information

| | |
|--|---------------------|
| Stainless steel AISI 316 (V4A) housing part no. | 68053034 |
| Box dimension | 1060 x 612 x 260 mm |
| Gross weight | 75.5 kg |
| Taric code | 84158300 |
| GTIN (EAN) | 5350604350588 |