



Description

Order Number:	921500001
Brand Name:	SLIMLINE NEO
IP protection class to EN 60 529:	IP 54 / IP 55
Note:	Cooling capacity range 400 W - 1600 W

Technical Data

Cooling capacity L35L35 (EN14511-3): 1500 W

Cooling capacity L35L50 (EN14511-3): 1200 W

EER L35L35: 3.2

Compressor type: BLDC Rotary Piston

Refrigerant / GWP: R 290 / 0.02

Refrigerant charge: 99 / 3.49 oz.

High / low Pressure: 3.0 / 0.7 MPa
435 / 101 psig

Air flow volume (system / unimpeded): Ambient air circuit: 650 / 1000 m³/h
Enclosure air circuit: 550 / 850 m³/h

Operating Temperature Range: 10°C - 60°C

UL temperature range: 10°C - 60°C

Mounting: External / Internal / Recess

Dimensions A x B x C (D+E): 950 x 395 x 260 (100+199+60) mm

Weight: 28 kg

Cut out dimensions: 910 x 345 mm

Voltage / Frequency: 115-230 V ~ 50/60 Hz

Current L35L35: 2.2 / 4.4 A

Max. current: 3.0 - 6.0 A

Nominal power L35L35: 460 W

Max. power: 670 W

Fuse: 15 A (T)

Short-circuit current rating: 5 kA


Connection: 4 pole connector for power, 5 pole connector for signals, 3 pole connector for RS485

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SLIMLINE NEO - future proof enclosure cooling](#)

Performance graph:

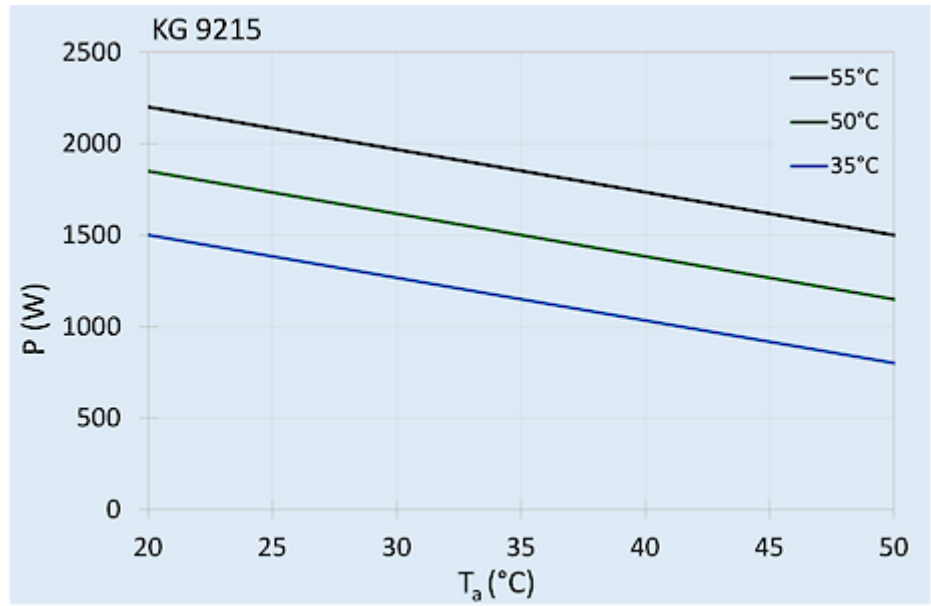

[click image to enlarge](#)