

Enclosure cooling unit



Description

Order Number:	922500001
Brand Name:	SLIMLINE NEO
IP protection class to EN 60 529:	IP 54 / IP 55
Note:	Cooling capacity range 500 W - 2600 W

Technical Data

Cooling capacity L35L35 (EN14511-3): 2500 W

Cooling capacity L35L50 (EN14511-3): 1700 W

EER L35L35: 2.8

Compressor type: BLDC rotary piston

Refrigerant / GWP: R 290 / 0.02

Refrigerant charge: 99 g / 3.49 oz.

High / low Pressure: 3.0 / 0.8 MPa
435 / 116 psig

Air flow volume (system / unimpeded): Ambient air circuit: 680 / 1000 m³/h
Enclosure air circuit: 650 / 1000 m³/h

Operating Temperature Range: 10°C - 60°C

UL temperature range: 10°C - 60°C

Mounting: Wall mounted

Dimensions A x B x C (D+E): 1350 x 395 x 290 mm

Weight: 36 kg

Cut out dimensions: 1316 x 351 mm

Voltage / Frequency: 115-230 V ~ 50/60 Hz

Current L35L35: 7.7 / 3.9 A

Max. current: 6.3 - 13 A

Nominal power L35L35: 880 W

Max. power: 1450 W

Fuse: 15 A (T)

Short-circuit current rating: 5 kA


Connection: 4 pole connector for power, 5 pole connector for signals, 3 pole connector for RS485

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview Product Group SLIMLINE NEO - future proof enclosure cooling](#)

Performance graph:

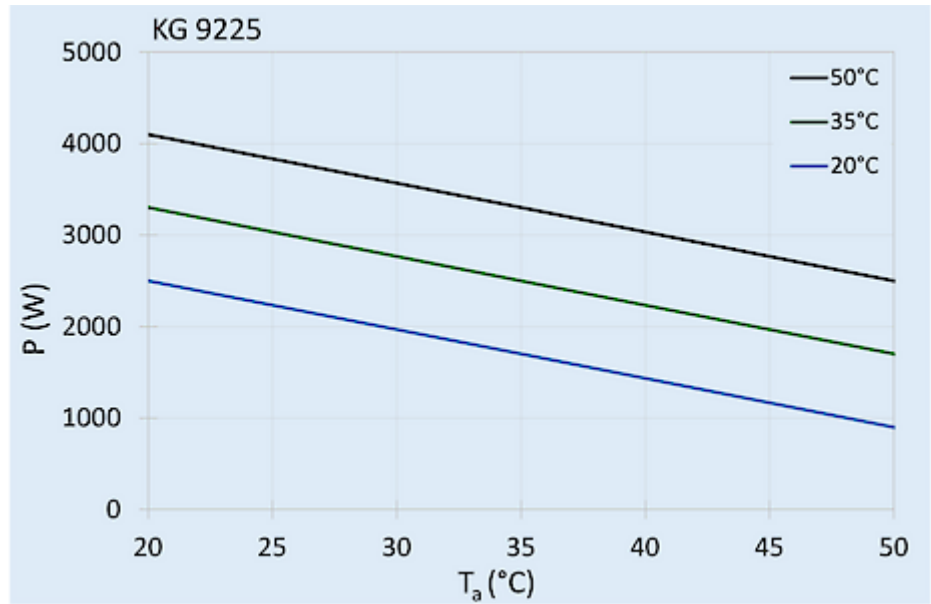

[click image to enlarge](#)

Cut out Dimensions:

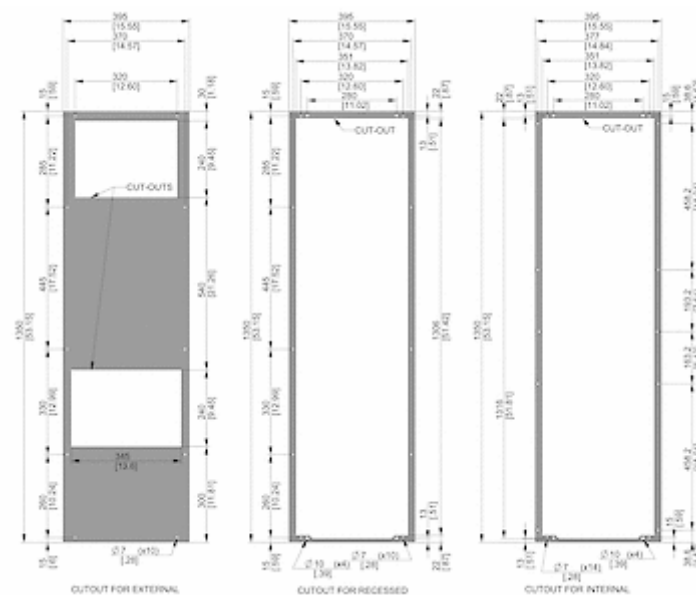

[click image to enlarge](#)