

Cooling unit NEMA / type 4X OC 5715-400V



Product Features


Brand Name:	SoliTherm
Order Number:	57152162
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection:	IP 56 / Type 12, 3, 3R, 4, 4X
Approvals:	CE, cURus, cULus
UL File Nummer:	cURus (SA32278), cULus (E498756)
Taric Code:	84158200

Technical data OC 5715-400V

Cooling capacity L35L35:	1.5 kW @ 50 Hz 1.5 kW @ 60 Hz
Cooling capacity L35L50:	1.25 kW @ 50 Hz 1.28 kW @ 60 Hz
Heating capacity:	1000 W
Compressor:	Reciprocating compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	400 g / 14 oz
High / low pressure:	26 / 6 bar 377 / 88 psig
Temperature range:	-40°C - +55°C
Air volume flow (system / unimpeded):	Ambient air circuit: 655 / 1200 m ³ /h Cabinet air circuit: 400 / 550 m ³ /h
Mounting:	External
Dimension H x W x D:	1,150 x 395 x 270 mm
Weight:	50 kg
Voltage / Frequency:	400/460 V - 50/60 Hz 2~
Current L35L35:	3.0 A @ 50 Hz 3.0 A @ 60 Hz
Starting current:	8.0 A
Max. current:	3.4 A / 3.6 A
Nominal power L35L35:	1.07 kW @ 50 Hz 1.07 kW @ 60 Hz
Max. power:	1.30 kW
Fuse:	6 A (T)
Connection:	Connection terminal block

Please click on the graphics to download.
 More CAD drawings can be found under [Product Download](#).
 > [Overview product group Cabinet cooling units - UL Type 4X](#)

Performance Graph:

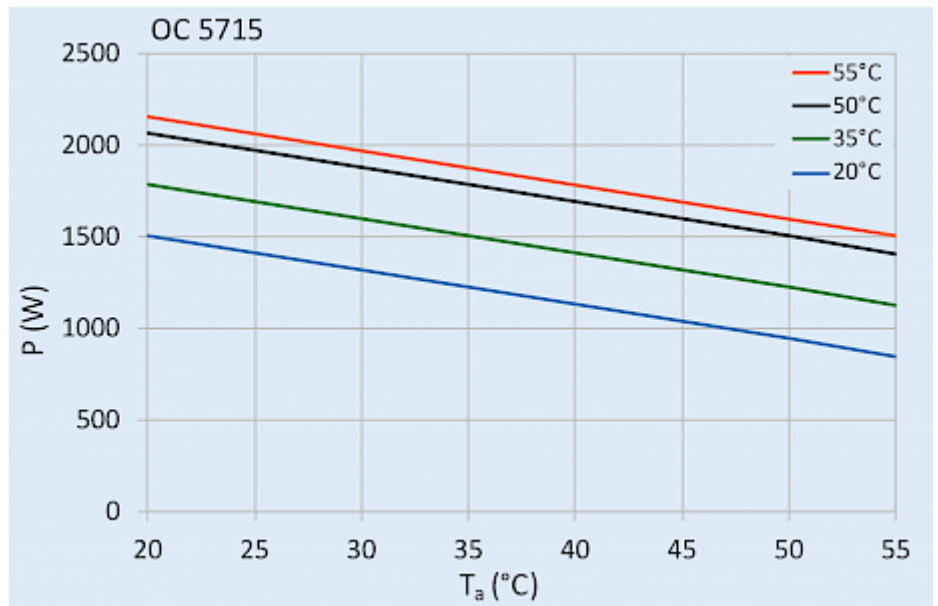

[click image to enlarge](#)

Cut out dimensions:



[click image to enlarge](#)