

## Outdoor cooling unit OC 5726-400V



### Product Features


<b>Brand Name:</b>	SoliTherm Outdoor
<b>Order Number:</b>	572620001
<b>Color:</b>	RAL 7035
<b>Housing Material:</b>	Mild steel, powder coated
<b>Ingress protection:</b>	IP 56 / Type 12, 3, 3R, 4
<b>Optional:</b>	With cabinet heater order no. 572621001
<b>Approvals:</b>	CE, cURus, cULus
<b>UL File Nummer:</b>	cURus (SA32278), cULus (E498756)
<b>Taric Code:</b>	84158200

## Technical data OC 5726-400V

<b>Cooling capacity L35L35:</b>	2.5 kW @ 50 Hz 2.5 kW @ 60 Hz
<b>Cooling capacity L35L50:</b>	1.97 kW @ 50 Hz 2.04 kW @ 60 Hz
<b>Compressor:</b>	Rotary piston compressor
<b>Refrigerant / GWP:</b>	R134a / 1430
<b>Refrigerant charge:</b>	950 g / 34 oz
<b>High / low pressure:</b>	24 / 6 bar 348 / 88 psig
<b>Temperature range:</b>	-40°C - +55°C
<b>Air volume flow (system / unimpeded):</b>	Ambient air circuit: 765 / 1200 m <sup>3</sup> /h Cabinet air circuit: 950 / 1200 m <sup>3</sup> /h
<b>Mounting:</b>	External
<b>Dimension H x W x D:</b>	1,550 x 457 x 355 mm
<b>Weight:</b>	80 kg
<b>Voltage / Frequency:</b>	400/460 V - 50/60 Hz 2~
<b>Current L35L35:</b>	2.9 A @ 50 Hz 2.6 A @ 60 Hz
<b>Starting current:</b>	6.1 A / 6.8 A
<b>Max. current:</b>	3.6 A / 3.2 A
<b>Nominal power L35L35:</b>	940 W @ 50 Hz 1.18 kW @ 60 Hz
<b>Max. power:</b>	1,30 kW @ 50Hz 1,64 kW @ 60 Hz
<b>Fuse:</b>	2 x 9 A (T)
<b>Connection:</b>	Connection terminal block


Please click on the graphics to download.  
 More CAD drawings can be found under [Product Download](#).  
 > [Overview product group Cabinet cooling units - Outdoor](#)

**Performance Graph:**

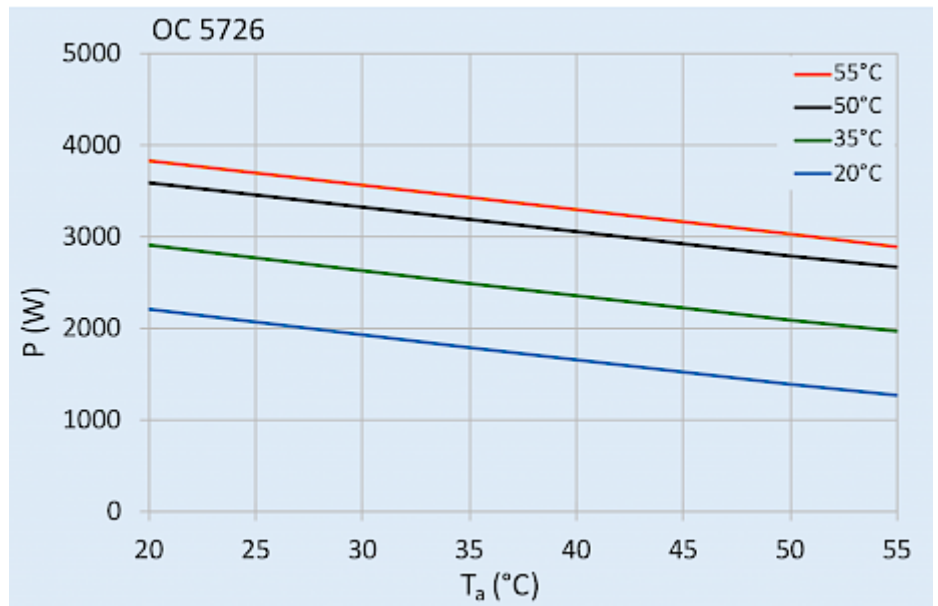

[click image to enlarge](#)

**Cut out dimensions:**

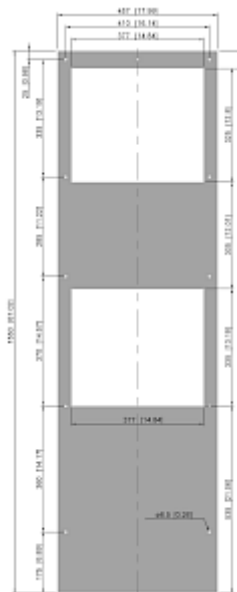

[click image to enlarge](#)