


stripLite SL-4000

LED enclosure light



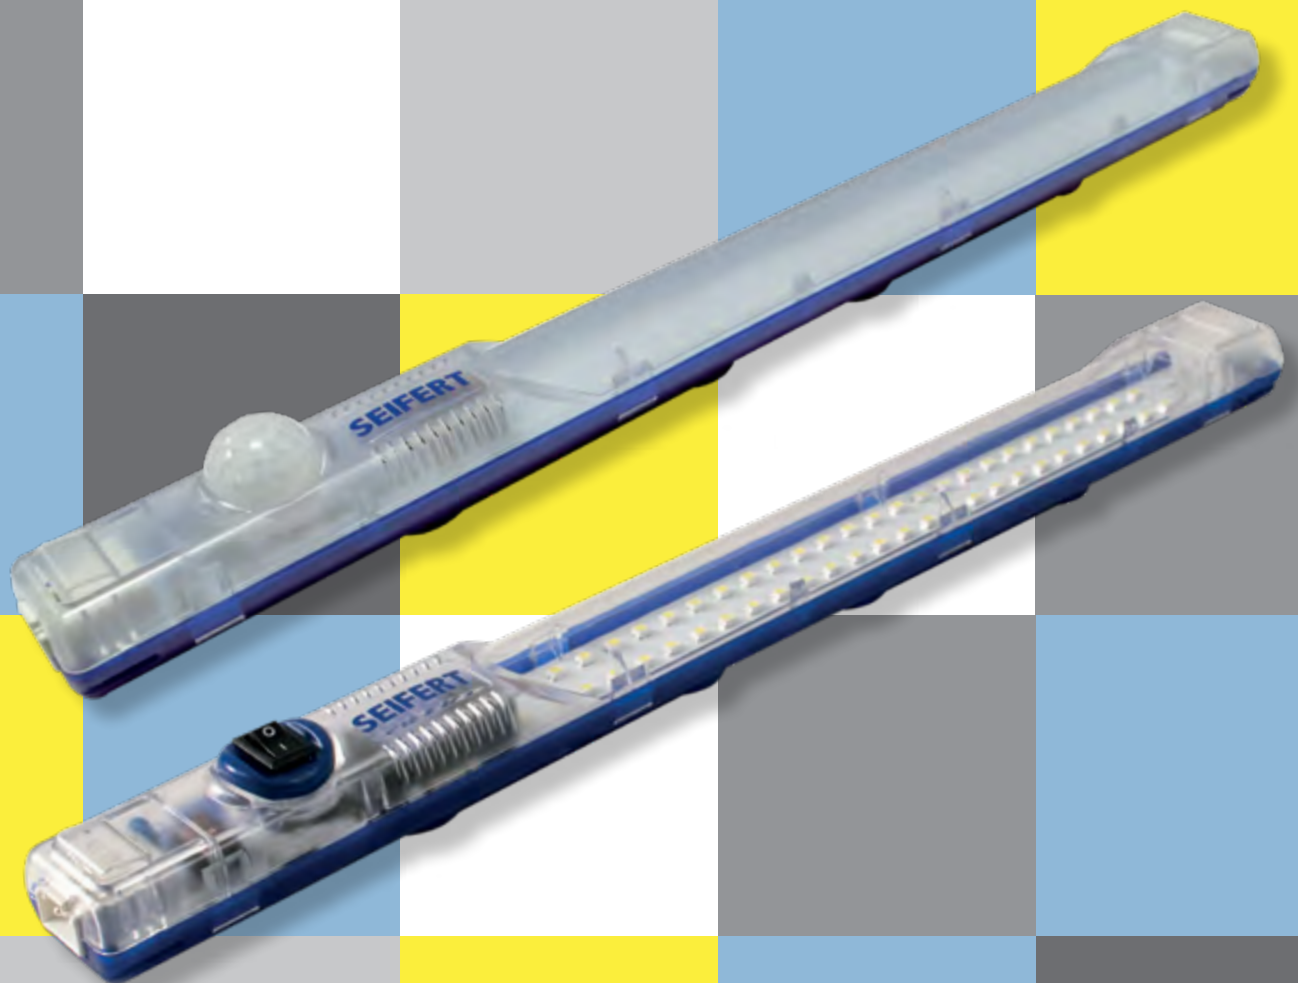

stripLite SL-4000			
Type	24 - 265 V	12 V	120 - 230 V
Order no. with motion sensor, Wieland	400000	400012	400076
Order no. with motion sensor, push fit	400400	400412	n/a
Order no. with ON/OFF switch, Wieland	400100	400112	400176
Order no. with ON/OFF switch, push fit	400500	400512	n/a
PERFORMANCE DATA			
Power Consumption	4 Watt		8 Watt
Light output (luminous flux)	400 Lm	300 Lm	700 Lm
Light color / temperature	Cool white / 6,500K		
Lamp type	LED, 120° angle		
Life time (@ 20°C)	50,000 hrs.		
Operating temp. range	-30°C - +70°C		
Switch off time (motion sensor)	5 min.		
DIMENSIONS			
Dimensions (L x W x H)	357.4 x 32 x 35.5 (31.16) mm		
Material housing	PC clear (Top), PC blue (Base)	PC frosted (Top), PC blue (Base)	
Weight	140 gr.		
ELECTRICAL DATA			
Voltage / Frequency	24 - 265 V AC / DC ~ 50/60 Hz	12 V DC	120 - 230 V AC / DC ~ 50/60 Hz
Protection class	II (double insulated)		
IP protection to IEC 60 529	IP 20		
Mounting	Magnets, clips		
Certification	CE, cURus, CSA		


'Lights off, LED on'

The new **stripLite** LED light fixture is the economical and space saving solution for cabinet and enclosure lighting. The state of the art LED technology ensures a long and maintenance free life cycle.


The main features are:

- Combined AC & DC voltage range allows the universal use with a single model
- Motion sensor or ON/OFF switch available
- Various fitting options for more flexibility
- Daisy chain cables allow to connect up to 16 lights with AC and up to 8 lights with DC voltage
- Wieland or push fit connector for fast and easy installation

Mounting Accessories



Screw mount clip M6

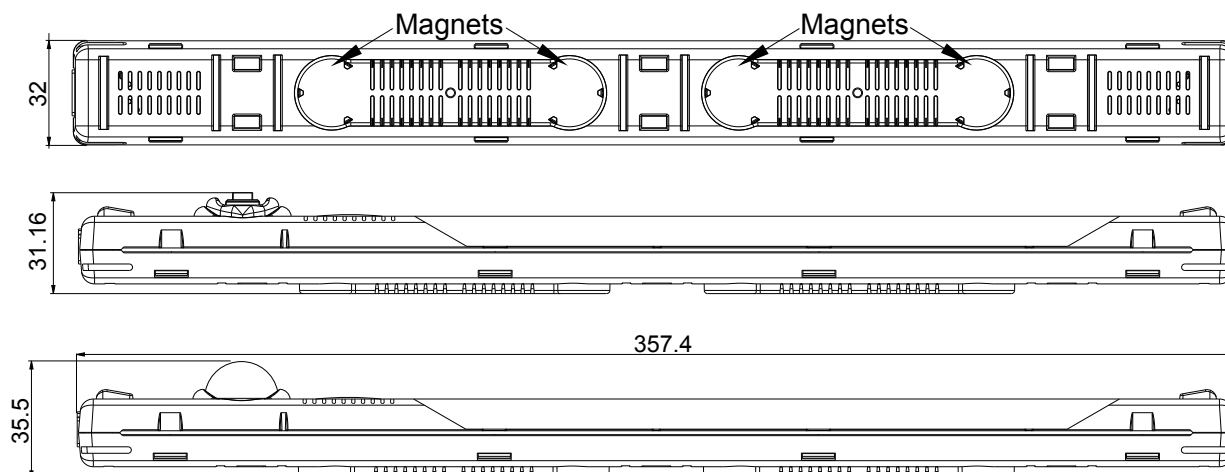

stripLite connectors & cables



Wieland female connector



Wieland male connector

Type	Description	Cable colour	Mounting	Approvals
WS 400702	Wieland female connector for cables Ø 6 - 7.7 mm, AWG 18-22		Screw connection	CE, cURus, CSA
WS 400703	Wieland male connector for cables Ø 6 - 7.7 mm, AWG 18-22		Screw connection	CE, cURus, CSA



WK 400711	Power cable 2 x AWG 18, halogen free with Wieland female connector, 3 m	white	Plug connection	CE, cURus ¹⁾ , CSA
WK 400712	Power cable 2 x AWG 18, halogen free with Wieland female connector, 3 m	orange	Plug connection	CE, cURus ¹⁾ , CSA
WK 400713	Power cable 2 x AWG 18, halogen free with Wieland female connector, 3 m	blue	Plug connection	CE, cURus ¹⁾ , CSA

¹⁾ applies only to individual components, connector and cable



DC 400721	Daisy chain cable 2 x AWG18, halogen free, with Wieland male / female 0.5 m	white	Plug connection	CE, cURus ¹⁾ , CSA
DC 400722	Daisy chain cable 2 x AWG18, halogen free, with Wieland male / female 0.5 m	orange	Plug connection	CE, cURus ¹⁾ , CSA
DC 400723	Daisy chain cable 2 x AWG18, halogen free, with Wieland male / female 0.5 m	blue	Plug connection	CE, cURus ¹⁾ , CSA
DC 400731	Daisy chain cable 2 x AWG18, halogen free, with Wieland male / female 1 m	white	Plug connection	CE, cURus ¹⁾ , CSA
DC 400732	Daisy chain cable 2 x AWG18, halogen free, with Wieland male / female 1 m	orange	Plug connection	CE, cURus ¹⁾ , CSA
DC 400733	Daisy chain cable 2 x AWG18, halogen free, with Wieland male / female 1 m	blue	Plug connection	CE, cURus ¹⁾ , CSA

¹⁾ applies only to individual components, connector and cable




Power cable 2 x AWG 18, halogen free with door switch and Wieland female connector. Door switch: normally closed (NC), strain release, mounting plate.

DC 400742	Power cable 2 x AWG18, with door switch and Wieland female connector, 3.5 m	orange	Plug connection	CE, cURus ¹⁾ , CSA
-----------	---	--------	-----------------	-------------------------------


¹⁾ applies only to individual components, connector and cable

Push fit connector

Wieland connector

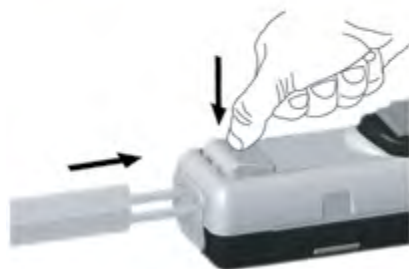

Light Distribution Curve

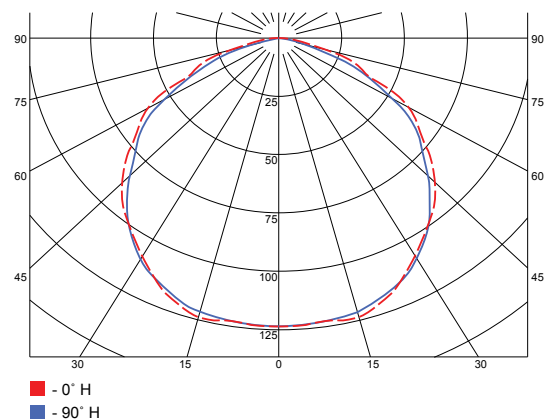



wegweisend innovativ

Seifert Systems GmbH

Albert - Einstein Str. 3
42477 Radevormwald

Germany

Tel. +49 (0) 2195 68994-0
Fax +49 (0) 2195 6899420

info.de@seifertsystems.com

Seifert Systems Ltd.

HF 09/10 Hal Far Industrial Estate
Birzebbuga, BBG 3000

Malta

Tel. +356 2220 7000
Fax +356 2165 2009

info@seifertsystems.com

Seifert Systems AG

Wilerstraße 16
CH- 4563 Gerlafingen

Switzerland

Tel. +41 (0) 32 675 35 51
Fax +41 (0) 32 675 44 76

info.ch@seifertsystems.com

Seifert Systems Inc.

75 Circuit Drive
North Kingstown
RI 02852
USA

Tel. +1 401-294-6960
Fax +1 401-294-6963

info.us@seifertsystems.com

Seifert Systems Australia Pty Ltd.

105 Lewis Road
Wantirna South
3152 Victoria
Australia

Tel. +61 (3) 98 01 19 06
Fax +61 (3) 98 87 08 45

info@seifertsystems.com.au

www.seifertsystems.com



www.facebook.com/seifert.mtmsystems