





Cabinet cooling unit



Description

Order Number:	850810001
Brand Name:	SLIMLINE PRO
Colour:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress Protection:	IP 55 / Type 12
Approvals:	CE, CURus, cULus
Accessories:	<div style="display: flex; align-items: center; margin-bottom: 10px;">  <div style="margin-left: 20px;"> Gasket Kit Type 4/4X </div> </div> <div style="display: flex; align-items: center; margin-bottom: 10px;">  <div style="margin-left: 20px;"> Cold Air Outlet Duct 8508/12/8412 </div> </div> <div style="display: flex; align-items: center; margin-bottom: 10px;">  <div style="margin-left: 20px;"> Washable Aluminium Filter 8508/12/8412 </div> </div> <div style="display: flex; align-items: center;">  <div style="margin-left: 20px;"> Vibration Protection Kit 1 </div> </div>

Technical Data

Cooling capacity L35L35:	825 W @ 50 Hz 870 W @ 60 Hz
Cooling capacity L35L50:	820 W @ 50 Hz 835 W @ 60 Hz
EER L35L35:	1.80
Compressor type:	Rotary piston
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	175 g / 6.2 oz
High / low Pressure:	30 / 6 bar 435 / 88 psi
Operating Temperature Range:	10°C - 60°C
UL temperature range:	10°C - 55°C
Air flow volume (system / unimpeded):	Ambient air circuit: 370 / 650 m ³ /h Cabinet air circuit: 350 / 550 m ³ /h
Mounting:	Wall mounted / recessed
Dimensions A x B x C (D+E):	950 x 305 x 210 (55+155) mm
Weight:	30 kg
Voltage / Frequency:	120 V ~ 50/60 Hz
UL Voltage / Frequency:	120 V ~ 60 Hz
Current L35L35:	4.2 A @ 50 Hz 4.6 A @ 60 Hz
Starting current:	28 A
Max. current:	6.8 A
Nominal power L35L35:	460 W @ 50 Hz 520 W @ 60 Hz
Max. power:	690 W
Fuse:	15 A (T)
Max circuit ampacity:	15 A
Short-circuit current rating:	5 kA
Rated current compressor:	3.2 A

Full load current fans:

2.5 A

Connection:

4 pole terminal for power


5 pole terminal for signals

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview Product Group Cooling Units - SLIMLINE PRO](#)

Performance graph:

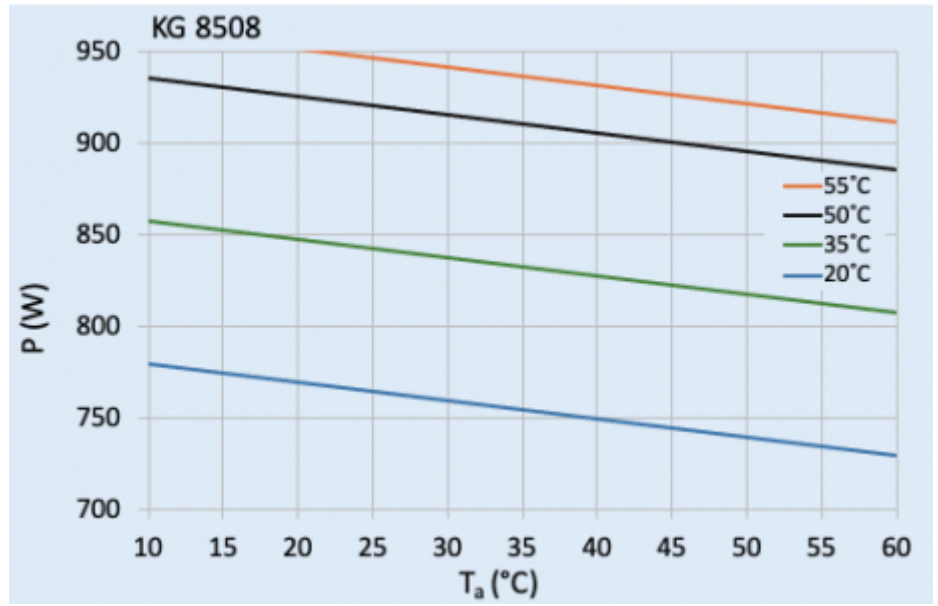

[click image to enlarge](#)

Cut Out Dimension:

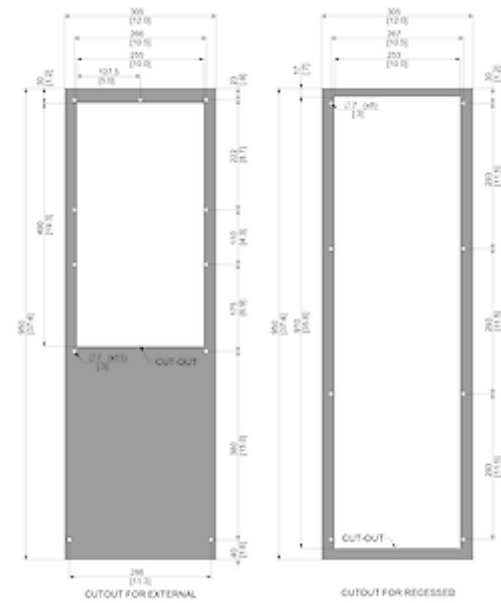

[click image to enlarge](#)

Order Information

Box dimensions	1042 x 405 x 242 mm
Taric code	31 Kg
Taric code	84158200
GTIN (EAN)	5350604390058