

Outdoor Radar Dome Air Conditioner OC 4410-230V



Product Features


Brand Name:	SoliTherm Outdoor
Order Number:	4410918
Color:	RAL 7035
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection:	IP 56
Note:	The unit has an internal MCB (miniature circuit breaker) accessible by removing the front cover
Approvals:	CE, RoHS
Taric Code:	84158200

Technical data OC 4410-230V

Cooling capacity L35L35:	1.6 kW (L40L45)
Cooling capacity L35L50:	1.6 kW (L40L45)
Compressor:	Rotary piston compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	750 g / 26 oz
High / low pressure:	21 / 6 bar 305 / 88 psig
Temperature range:	+20°C - +50°C
Air volume flow (system / unimpeded):	Ambient air circuit: 530 / 1200 m ³ /h Cabinet air circuit: 375 / 550 m ³ /h
Mounting:	External
Dimension H x W x D:	550 x 557 x 500 mm
Weight:	50 kg
Voltage / Frequency:	230 V ~ 50/60 Hz
Current L35L35:	4.2 A
Starting current:	15.5 A
Max. current:	4.7 A
Nominal power L35L35:	1.02 kW
Fuse:	10 A (T)
Connection:	2 x 3 m 1.8 Ø Flexible plastic duct


Please click on the graphics to download.
 More CAD drawings can be found under [Product Download](#).
 > [Overview product group Cabinet cooling units - Outdoor](#)

Performance Graph:

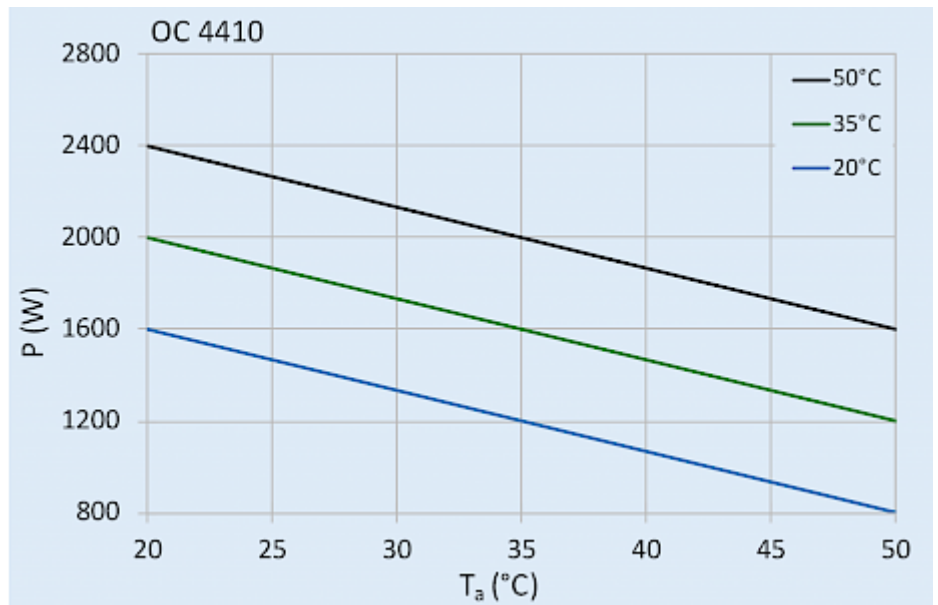

[click image to enlarge](#)

Cut out dimensions:

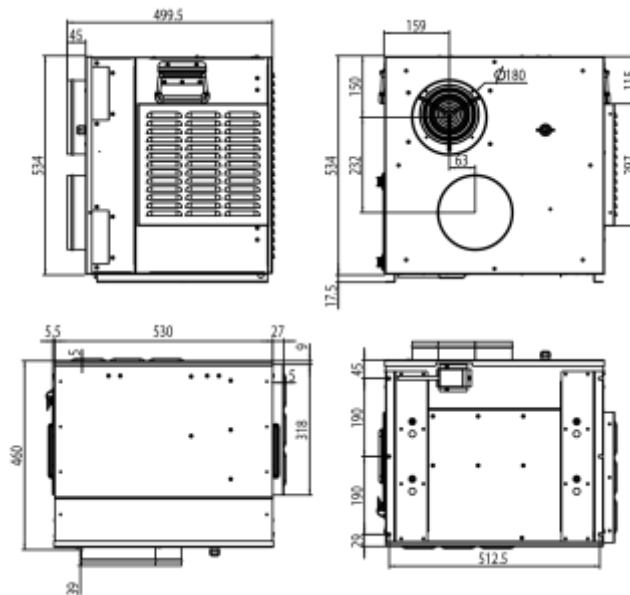

[click image to enlarge](#)